




## SUBMITTAL DATA SHEET

Console Heat Pump System	
Location: _____	Approval: _____
Engineer: _____	Date: _____
Submitted to: _____	Construction: _____
Submitted by: _____	Unit #: _____
Reference: _____	Drawing #: _____

<b>Set Code</b>	22022610000421
Indoor unit code	22022611000227
Outdoor unit code	22022016015900
<b>Set Model</b>	
Indoor unit model	MIU-B16F-2
Outdoor unit model	MOU-A18H-2
<b>Certified</b>	
AHRI	
UL	

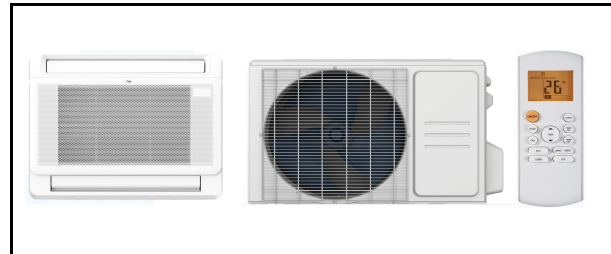

### SYSTEM PERFORMANCE DATA

<b>Power supply</b>		
Normal Operational Voltage	(V, Ph, Hz)	208/230V, 1Ph, 60Hz
Voltage Range	(V)	187-253
<b>Electrical</b>		
Minimum circuit ampacity(Outdoor)	(A)	20.0
Max.fuse(Outdoor)	(A)	25.0
Connection wiring		0
<b>Cooling</b>		
Capacity	(Btu/h)	16000(7800~16400)
Power Input	(W)	1456(340~1774)
Current	(A)	6.66(2.55~7.85)
SEER2	(Btu/W)	20.2
EER2	(Btu/W)	11.0
<b>Heating</b>		
Capacity	(Btu/h)	17000(8600~21800)
Power Input	(W)	1779(590~2063)
Current	(A)	8.0(3.95~9.05)
HSPF2-4	(Btu/W)	8.9
HSPF2-5	(Btu/W)	7.3
COP	W/W	2.80
Heat at 17F(H32)	(Btu/h)	14700
Heat at 5F(H42)	(Btu/h)	16700
COP at 5F(H42)	W/W	1.76

### REFRIGERANT PIPE DATA

Throttle type	Indoor unit	N/A
	Outdoor unit	EXV
Design pressure	(PSIG)	550/340
Refrigerant Type		R410A
Refrigerant charge	oz	65.26
Refrigerant precharge	(ft)	0.0
	(m)	0.0
Additional charge for each ft	(oz/ft)	0.16
Additional charge for each m	(g/m)	15.0
Liquid side/ Gas side(indoor)	(inch)	1/4"/1/2"
	(mm)	6.35/12.7
Liquid side/ Gas side(outdoor)	(inch)	1/4"/1/2"
	(mm)	6.35/12.7
Max. pipe length	(ft)	98.4
	(m)	30.0
Max. difference in level	(ft)	65.6
	(m)	20.0
Connection method		Flared
Indoor(cooling)	(Deg. °F)	60~90
	(Deg. °C)	16~32
Indoor(heating)	(Deg. °F)	32~86
	(Deg. °C)	0~30
Outdoor(cooling)	(Deg. °F)	-22~-122
	(Deg. °C)	-30~50
Outdoor(heating)	(Deg. °F)	-22~75
	(Deg. °C)	-30~24


### INDOOR UNIT DATA

<b>Indoor fan motor</b>		
Model		ZKFP-13-8-136+ZKFP-13-8-104
Qty		1+1
Input	(W)	/
Output	(W)	13.0
RLA	(A)	1.03
Speed(Hi/Mi/Lo)	(r/min)	1100/1000/900
<b>Air flow &amp; Noise level</b>		
Indoor air flow (Hi/Med/Lo) (No duct)	(CFM)	500.00/441.18/382.35/323.53
Indoor noise level (Hi/Med/Lo)	[dB(A)]	45/40.5/30
<b>Dehumidification</b>	(L/H)	2.05
<b>Indoor unit</b>		
Dimension (WxDxH)	(inch)	31.26x7.87x24.45
	(mm)	794x200x621
Packing(WxDxH)	(inch)	34.06x11.02x28.31
	(mm)	865x280x719
Net/Gross weight	(lbs.)	32.85/41.45
	(kg)	14.9/18.8

### OUTDOOR UNIT DATA

<b>Compressor</b>		
Type		Twin-ROTARY
Model		KTM240D43UKT
Brand		GMCC
Capacity	(Btu/h)	25931
Input	(W)	2045
Rated current (RLA)	(A)	14.3
Refrigerant oil/oil charge	(ml)	ESTER OIL VG74 620
<b>Outdoor fan motor</b>		
Model		ZKFN-80-8-3
Qty		1
Input	(W)	/
Output	(W)	80.00
RLA	(A)	0.76
Speed	(r/min)	810/720
<b>Air flow &amp; Noise level</b>		
Outdoor air flow (Max.)	(CFM)	1764.7
Outdoor noise level	[dB(A)]	58.0
<b>Outdoor unit</b>		
Dimension (WxDxH)	(inch)	35.04x13.46x26.50
	(mm)	890x342x673
Packing (WxDxH)	(inch)	39.17x15.67x29.13
	(mm)	995x398x740
Net/ Gross weight	(lbs.)	100.97/108.03
	(kg)	45.8/49

Indoor unit dimension

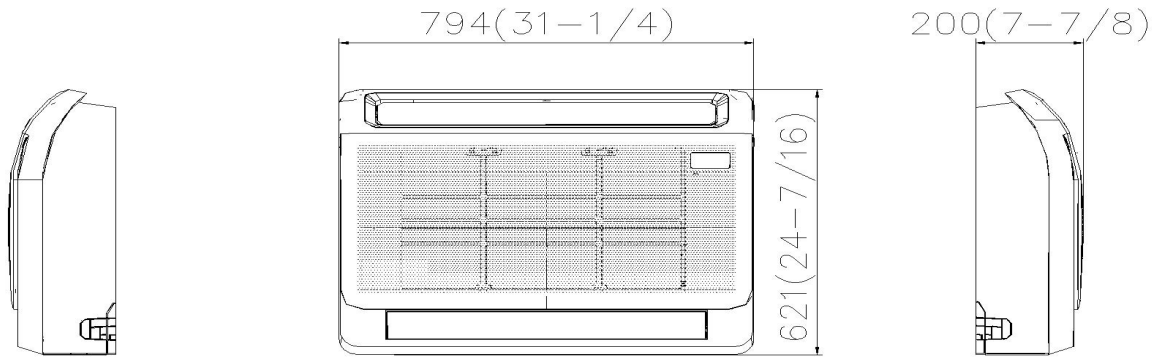

Outdoor unit dimension

